

12W Constant Voltage-SS Series



Features

- Class II, SELV, built-in
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor 0.85C
- Efficiency $\geq 83\%$
- 5 years warranty

Applications


- LED strips



Description

SS-12-XX MB is a 12W constant voltage LED driver that operates from 198-264Vac input with 12V or 24V output voltage. With it's compact dimensions from 68.5 x 35 x 23mm it is easy to integrate in LED strips products. To ensure trouble-free operation, protection is provided against output short circuit, over Load and over temperature.


Model code

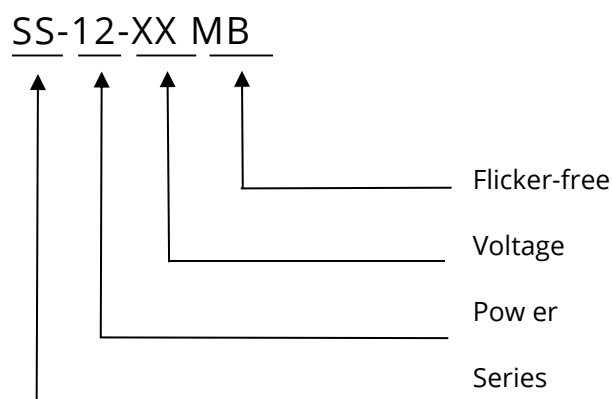


Specification

Output	Constant Voltage	12VDC	24VDC
	Current Range	0-1A	0-0.5A
	Voltage Accuracy	±5%	
	Output HF current ripple(≥1KHz)	±5%	
	Output LF current ripple(≤120Hz)	≤±5%@Full Load,230VAC	
	Efficiency(Typ.)	83%	
Input	Rated input voltage	220-240VAC	
	Range of input voltage	198- 264 VAC	
	Rated input voltage(DC)	198-254VDC	
	Frequency(Hz)	0/50/60 Hz	
	Power Factor	0.85C@Full Load, 230VAC	
	Input Current max	0.12A MAX. @Full Load,198VAC	
	Start-up time	<0. 5S	
	No Load Power	≤0.5W	
	THD (Typ.)	<44%	
Protection	Over Load Protection	105-150%	
		YES/Auto Resume	
	Over Voltage Protection	>12.6VDC	>25.2VDC
		YES/Auto Resume	
	Short circuit Protection	YES/Auto Resume	
Environment	Over Temperature Protection	YES/Auto Resume	
	Operating Temperature	-20°C~+45°C	
	Humidity	20%-90%RH	
	Tc	80°C	
	Storage Temperature	-20°C~+60°C	
Surface	Life time	>50000h@Tc=70°C	
	Dimension	68.5X35X23 (LXWXH)mm	
s standards	EN 61347-1; EN61347-2-13; EN62384; EN55015; EN61000-3-2 ; EN61000-3-3; EN 61547;		
Others	ErP	EU 2019/2020	
	RoHS	RoHS (2011/65/EU) (EU)2015/863	
Note	1.All parameters NOT specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature. Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor.		

Wiring diagram

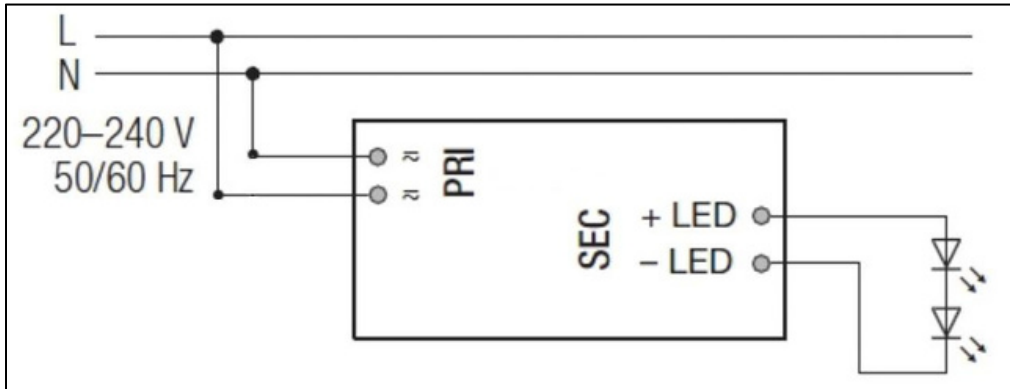


2D diagram

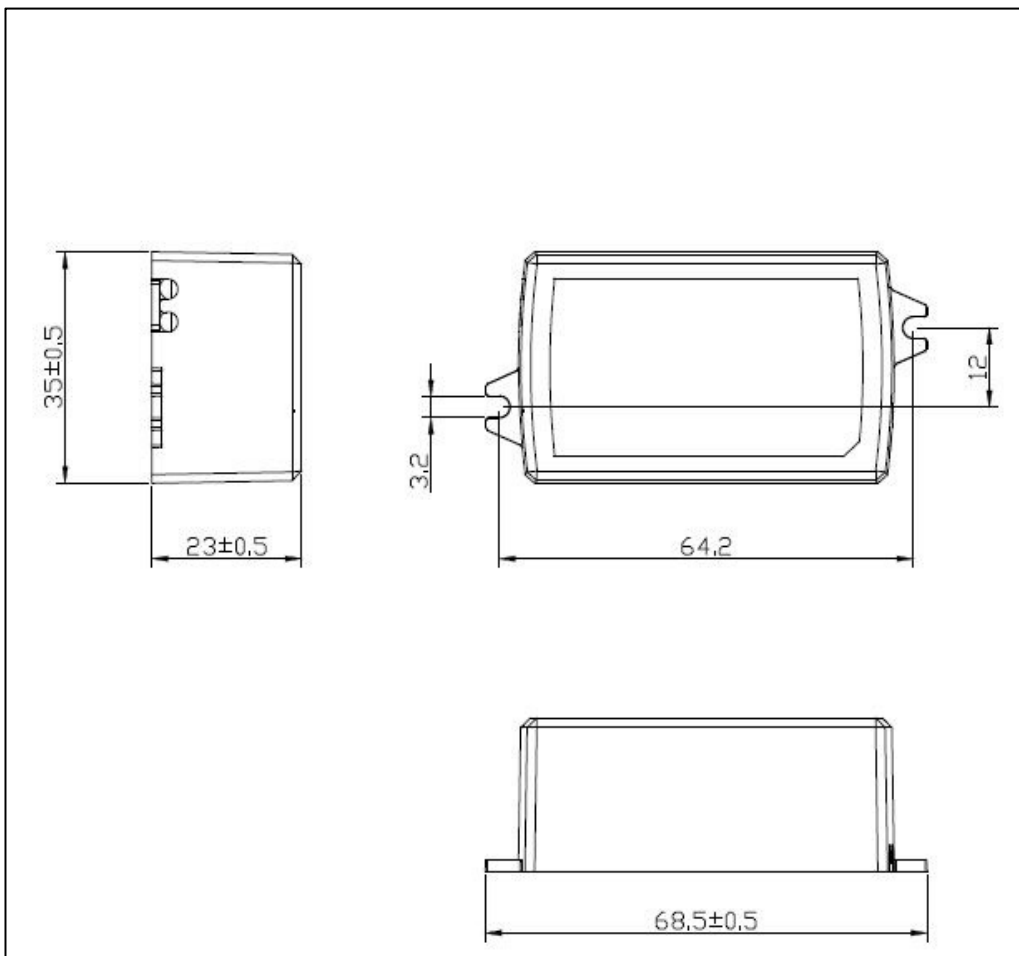


Curve for SS-12-12 MB


Lifetime vs. Temperature Curve

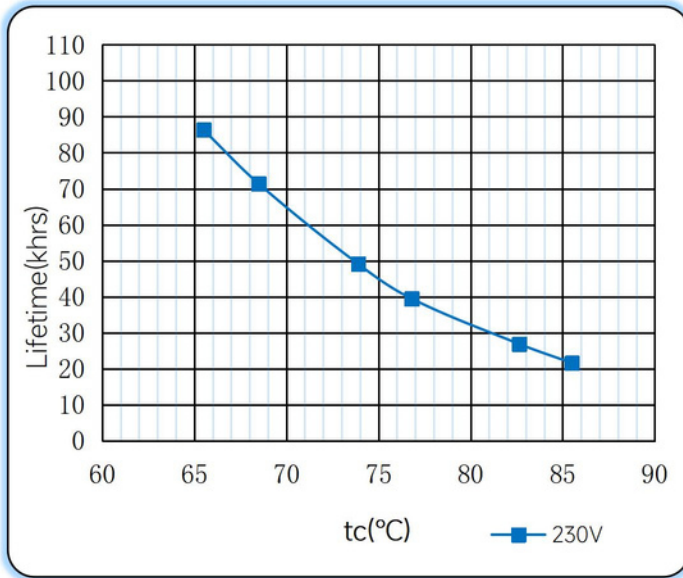


Efficiency vs. Load

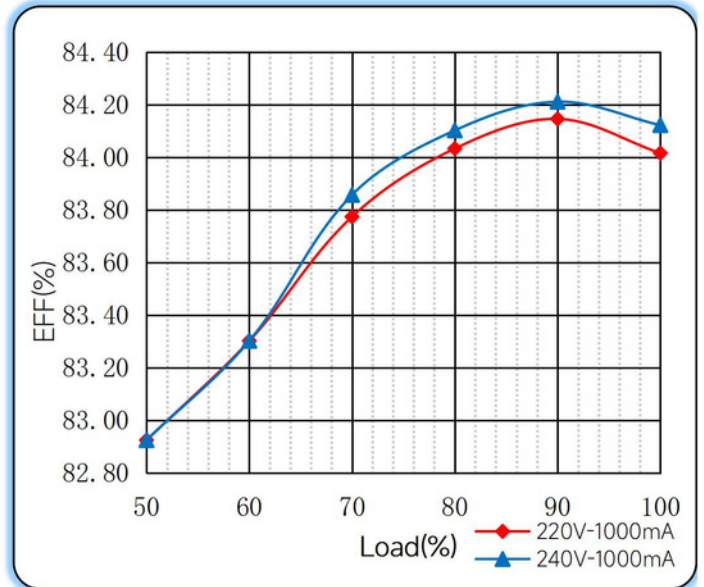


Power Factor Characteristics

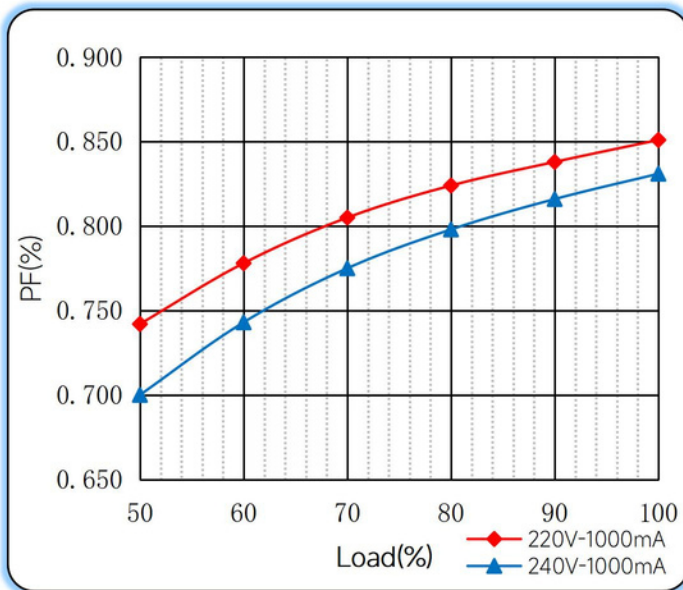

THD vs. Load

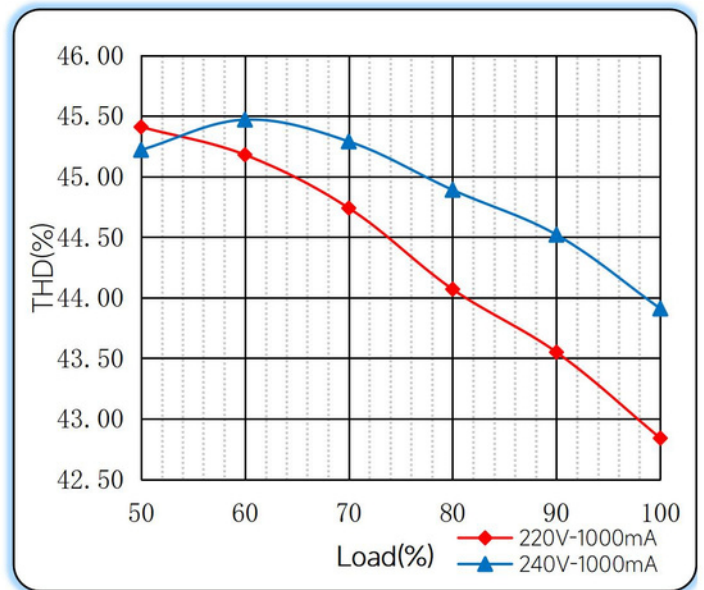

Operating window

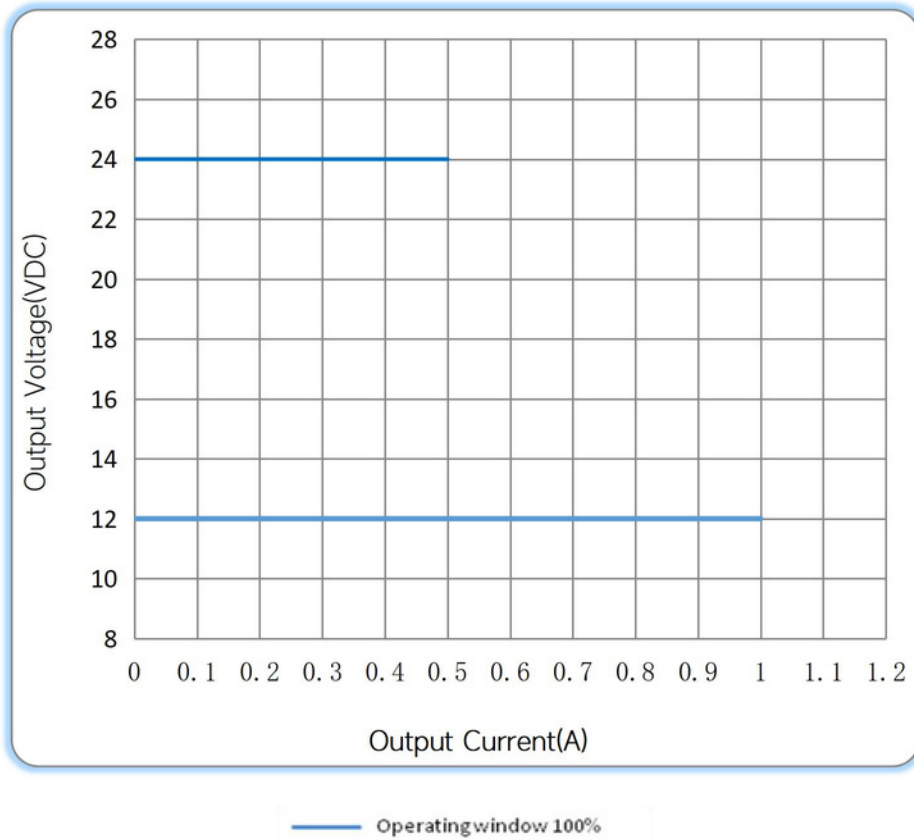

Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/05/15